


# **BLUE SPIRAL SILICONE CARBIDE POLLY PIG (BSSC)**

**ALL POLYESTER POLYURETHANE FOAM  
AND ELASTOMER. NO METAL PARTS!**

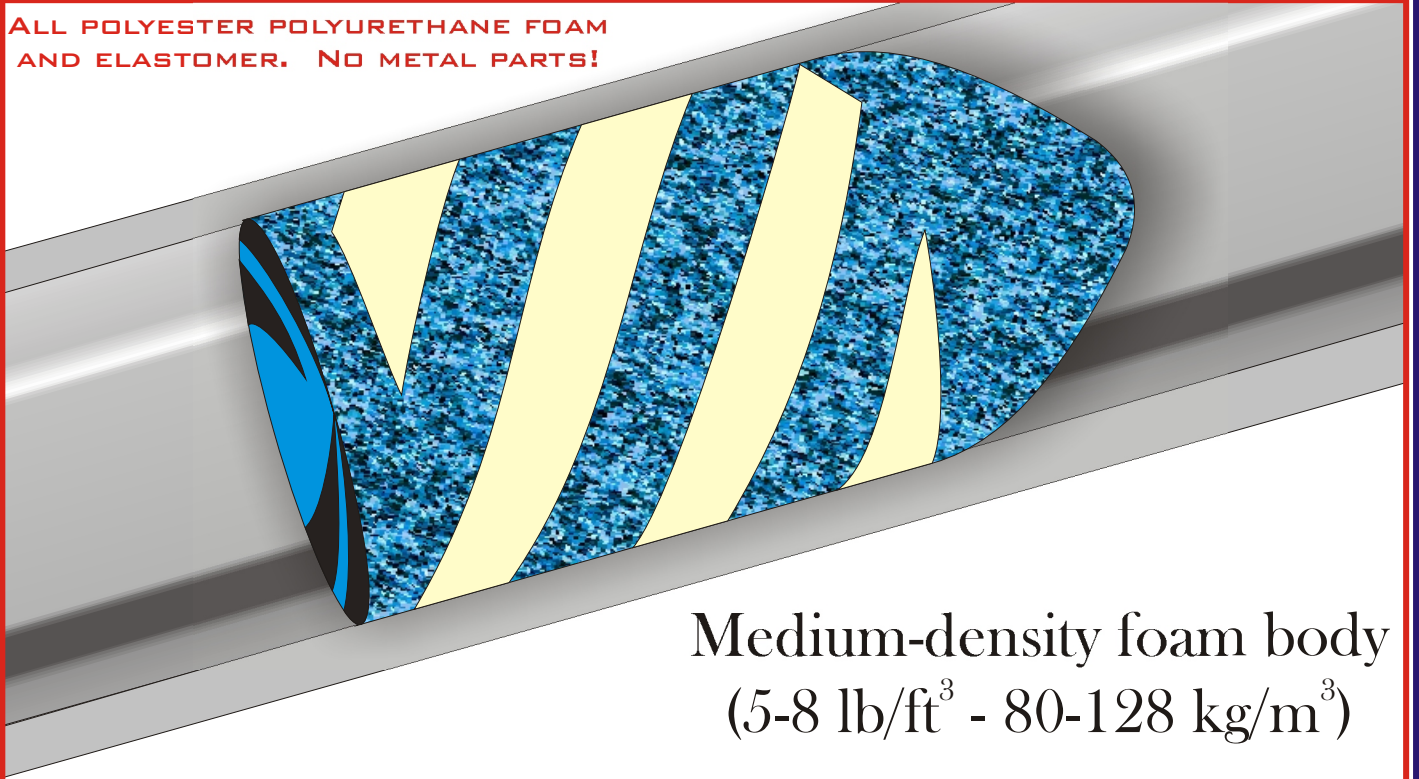

**Medium-density foam body  
(5-8 lb/ft<sup>3</sup> - 80-128 kg/m<sup>3</sup>)**

The Knapp Blue Spiral Silicone Carbide Polly Pig is used for short length runs in pipelines where an aggressive, abrasive substance is required to remove deposits on the pipe wall. The pig is capable of negotiating elbows, wyes and tees in the line, but caution should be taken before running this pig in a line with any restrictions or reductions in diameter. The Blue Spiral Silicone Carbide Polly Pig is manufactured using Knapp's exclusive K-Lite™ polyurethane foam (5-8 lb/ft<sup>3</sup> density); this tough, hi-flexibility, open-celled foam is particularly suited for the rugged environment encountered in modern pipelines. Contact Knapp or a qualified representative before using this pig in a line where reductions are present.

\*Note: The BSSC Polly Pig should not be used in non-metallic piping as it will physically scratch the pipe wall, creating an anchor point for future scale or deposit formation

**KNAPP**<sup>TM</sup>  
**POLLY PIG**

Knapp Document No. KPP-3B-p1-01, 8-29-00

e-mail: [knapp@pollypig.com](mailto:knapp@pollypig.com)  
[www.pollypig.com](http://www.pollypig.com)

1209 Hardy Street  
Houston, TX 77020  
Tel: 800/231-7205  
713/222-0146  
Fax: 713/222-7403

©1995-2000 KNAPP POLLY PIG, INC.