


# **BLUE MULTI-DIMENSIONAL POLLY PIG (BCC-MD)**

**ALL POLYESTER POLYURETHANE FOAM  
AND ELASTOMER. NO METAL PARTS!**

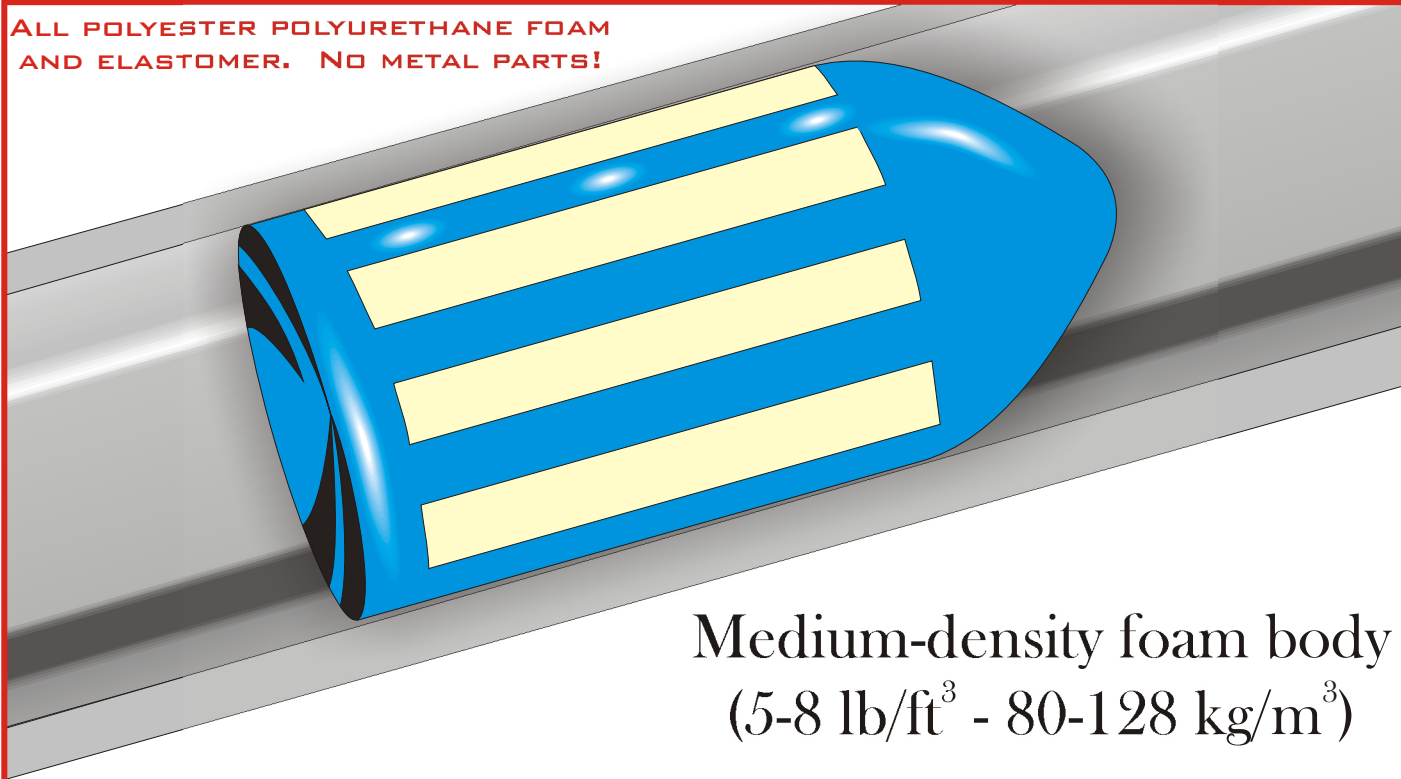

Medium-density foam body  
(5-8 lb/ft<sup>3</sup> - 80-128 kg/m<sup>3</sup>)

The Knapp Blue Multi-Dimensional Polly Pig is used for medium length runs in pipelines where large reductions in pipe cross-sectional area are encountered. The tough elastomer coating provides a flexible, yet highly abrasion resistant coating that allows the pig to reduce to pass through major cross-sectional reductions or restrictions and still clean the pipeline. It is still advisable for the pipeline operator to contact Knapp or a qualified representative before using the pig to ensure that the reduction is not too severe for safe passage. The Blue Multi-Dimensional Polly Pig is manufactured using Knapp's exclusive K-Lite™ polyurethane foam (5-8 lb/ft<sup>3</sup> density); this tough, hi-flexibility, open-celled foam is particularly suited for the rugged environment encountered in modern pipelines.



Knapp Document No. KPP-3E-p1-01, 8-29-00

e-mail: [knapp@pollypig.com](mailto:knapp@pollypig.com)  
[www.pollypig.com](http://www.pollypig.com)

1209 Hardy Street  
Houston, TX 77020  
Tel: 800/231-7205  
713/222-0146  
Fax: 713/222-7403

©1995-2000 KNAPP POLLY PIG, INC.